



TOP REMOVAL BIN VENT

The Nol-Tec top removal bin vent effectively filters dust laden air created by pneumatic conveying systems or other processes.

STANDARD FEATURES:


- Heavy gauge continuous welded construction
- Reverse pulse jet cleaning
- Continuous cleaning design
- Cartridge or bag filter media
- Magnehelic gauge
- Bird screen or weatherhood with bird screen
- External access to filter element
- No confined space requirements

OPTIONAL FEATURES:

- Stainless steel construction
- Variety of filter media materials
- Dirty air housing extensions
- Exhauster
- Hazardous location design
- Differential pressure automated cleaning

SPECIFICATIONS:

- **Compressed air:** Clean and dry at 80 PSIG minimum
- **Electrical:** Designed to meet customers specifications
- **Temperature (polyester bags):** 250° F
- **Temperature (polyester cartridges):** 225° F

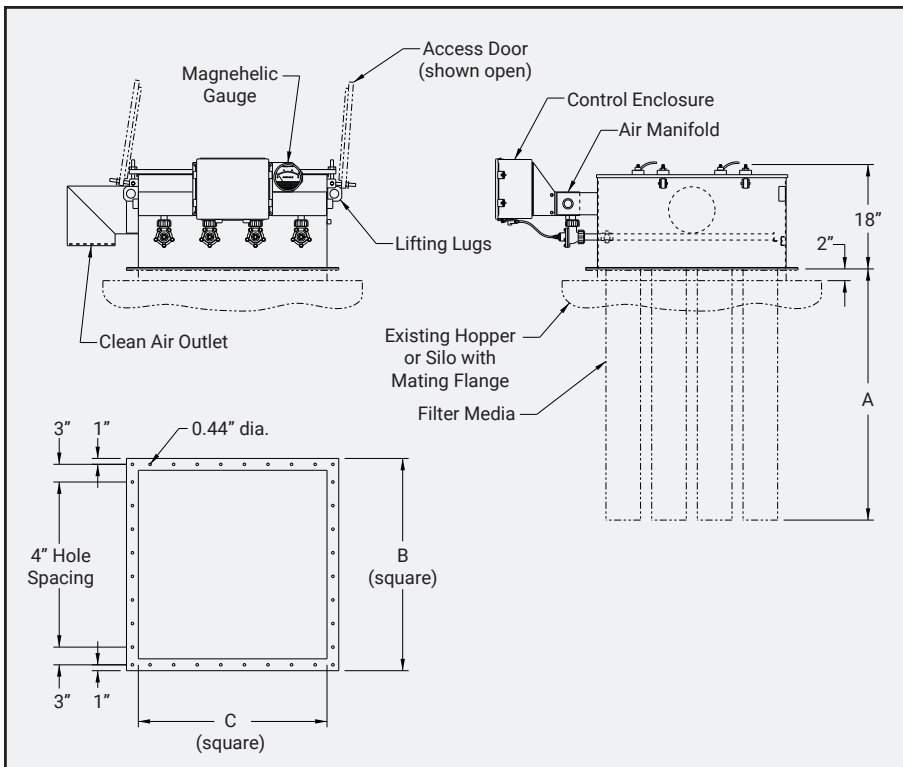

Specifications subject to change without notice.

SPECIFICATIONS WITH BAGS INSTALLED				
MODEL	FILTER AREA	A	B	C
TR09	41 ft ²	38"	28"	24"
TR09	68 ft ²	60"	28"	24"
TR09	95 ft ²	86"	28"	24"
TR16	72 ft ²	38"	36"	32"
TR16	120 ft ²	60"	36"	32"
TR16	168 ft ²	86"	36"	32"
TR25	188 ft ²	60"	44"	40"
TR25	263 ft ²	86"	44"	40"
TR36	270 ft ²	60"	52"	48"
TR36	378 ft ²	86"	52"	48"
TR49	368 ft ²	60"	60"	56"
TR49	515 ft ²	86"	60"	56"
TR64	480 ft ²	60"	68"	64"
TR64	672 ft ²	86"	68"	64"
TR81	851 ft ²	86"	76"	72"
TR100	1,050 ft ²	86"	84"	80"

SPECIFICATIONS WITH CARTRIDGES INSTALLED				
MODEL	FILTER AREA	A	B	C
TR09	90 ft ²	18"	28"	24"
TR09	270 ft ²	36"	28"	24"
TR16	160 ft ²	18"	36"	32"
TR16	480 ft ²	36"	36"	32"
TR25	250 ft ²	18"	44"	40"
TR25	750 ft ²	36"	44"	40"
TR36	360 ft ²	18"	52"	48"
TR36	1,080 ft ²	36"	52"	48"
TR49	1,470 ft ²	36"	60"	56"
TR64	1,920 ft ²	36"	68"	64"
TR81	2,430 ft ²	36"	76"	72"
TR100	3,000 ft ²	36"	84"	80"

* Other filter sizes available.

TRUSTED TO DELIVER®

Nol-Tec Systems, Inc | 425 Apollo Drive | Lino Lakes, MN 55014
651.780.8600 | sales@nol-tec.com | www.nol-tec.com

5.037.SALE.08.28.24.04

