



AIR ACTIVATED GRAVITY CONVEYOR

The Nol-Tec air activated gravity conveyor conveys dry granular or powdered materials in a fully enclosed dust-tight housing.

STANDARD FEATURES:

- 10-gauge construction
- Polyester aeration media
- Adjustable inlet location
- Air inlet in each section
- Inspection opening in each section
- Air controls include a flow control valve and pressure gauge for each air chamber and one solenoid valve for on/off operation. A pressure regulator and isolation valve can be provided as an option
- Single section uniform size or Multi-section uniform size or Multi-section reducing size


SPECIFICATIONS:

- **Compressed air:** clean and dry
- **Temperature (polyester membrane):** 310° F maximum

OPTIONAL FEATURES:

- Stainless steel construction
- Stainless steel aeration media
- Flanged inlet and outlet
- Multiple inlets and outlets
- High-temperature design
- Turning box(s)
- Tivar lining

| UNIFORM CONVEYOR SIZE DIMENSIONS | | | | | |
|----------------------------------|--------|-----|-----|--------|-------|
| SIZE | A | B | C | D | E |
| 4 | 3.75" | 4" | 6" | 8.50" | 2.00" |
| 6 | 5.75" | 6" | 8" | 10.50" | 2.00" |
| 8 | 7.75" | 8" | 10" | 12.50" | 2.00" |
| 10 | 9.75" | 10" | 12" | 14.50" | 2.00" |
| 12 | 11.75" | 12" | 14" | 16.50" | 2.00" |
| 14 | 13.75" | 12" | 16" | 16.50" | 2.00" |
| 16 | 15.75" | 12" | 18" | 16.50" | 2.00" |
| 18 | 17.75" | 12" | 20" | 16.50" | 2.00" |

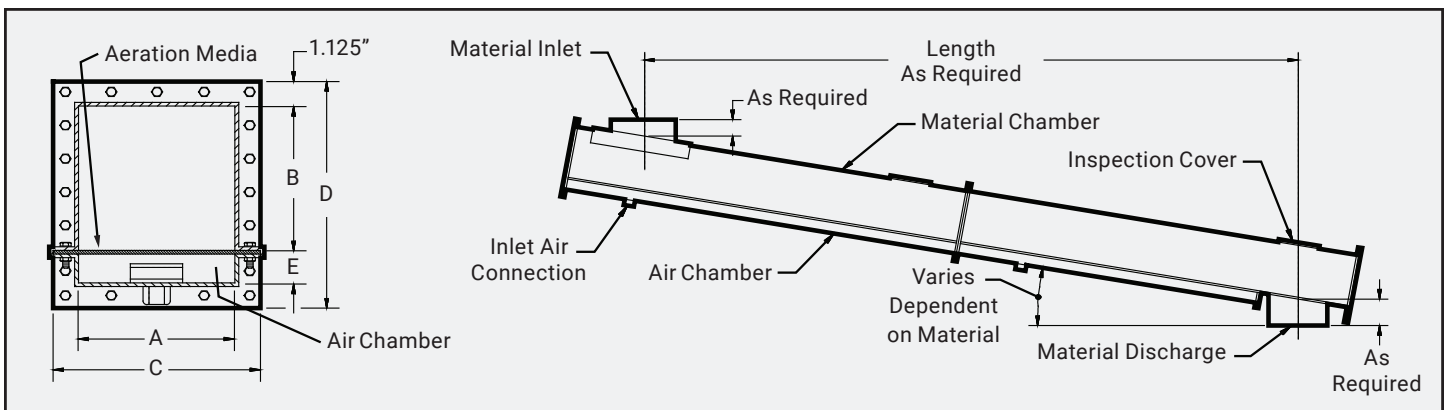

Specifications subject to change without notice.

TRUSTED TO DELIVER®

Nol-Tec Systems, Inc | 425 Apollo Drive | Lino Lakes, MN 55014
651.780.8600 | sales@nol-tec.com | www.nol-tec.com

5.009.SALE.12.30.24.04

