



# VACUUM FILTER/ RECEIVER

*Nol-Tec vacuum filter receivers effectively separate product from the motive air in a vacuum conveying system.*

### STANDARD FEATURES:


- Heavy gauge continuous welded construction
- Reinforced housing
- Reverse pulse jet cleaning
- Bottom grate
- Cartridge or bag filter media
- Magnehelic gauge
- Hopper bottom
- Quick-release bag clamps
- Access door
- Vacuum design 17" Hg

### SPECIFICATIONS:

- **Compressed air:** Clean and dry at 80 PSIG minimum
- **Temperature:** Polyester bags 250° F, Polyester cartridge with urethane ends 225° F
- **Electrical:** Designed to meet customers specification

### OPTIONAL FEATURES:

- Stainless steel construction
- Hazardous location design
- High-temperature design
- Variety of filter media materials available
- Additional access doors
- Hopper aeration
- High vacuum design to 30" Hg

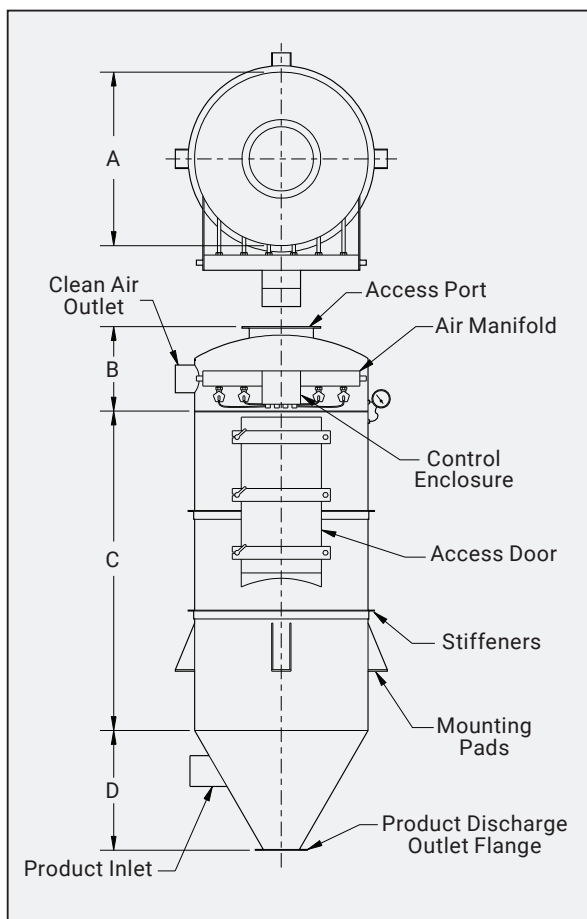

VACUUM FILTER/RECEIVER						
Model Number	Cartridge Filter area	Bag Filter area	A	B	C	D
36FR09	180 ft <sup>2</sup>	41 ft <sup>2</sup>	2.50 ft	1.75 ft	4.00 ft	1.58 ft
60FR09	270 ft <sup>2</sup>	68 ft <sup>2</sup>	2.50 ft	1.75 ft	6.00 ft	1.58 ft
84FR09	540 ft <sup>2</sup>	95 ft <sup>2</sup>	2.50 ft	1.75 ft	8.00 ft	1.58 ft
60FR14	420 ft <sup>2</sup>	105 ft <sup>2</sup>	3.00 ft	1.83 ft	6.00 ft	2.00 ft
84FR14	840 ft <sup>2</sup>	147 ft <sup>2</sup>	3.00 ft	1.83 ft	8.00 ft	2.00 ft
60FR18	540 ft <sup>2</sup>	135 ft <sup>2</sup>	3.50 ft	1.92 ft	6.00 ft	2.42 ft
84FR18	1,080 ft <sup>2</sup>	189 ft <sup>2</sup>	3.50 ft	1.92 ft	8.00 ft	2.42 ft
60FR24	720 ft <sup>2</sup>	180 ft <sup>2</sup>	4.00 ft	2.00 ft	6.00 ft	2.92 ft
84FR24	1,440 ft <sup>2</sup>	252 ft <sup>2</sup>	4.00 ft	2.00 ft	8.00 ft	2.92 ft
60FR32	960 ft <sup>2</sup>	240 ft <sup>2</sup>	4.50 ft	2.08 ft	6.00 ft	3.33 ft
84FR32	1,920 ft <sup>2</sup>	336 ft <sup>2</sup>	4.50 ft	2.08 ft	8.00 ft	3.33 ft
60FR38	1,140 ft <sup>2</sup>	285 ft <sup>2</sup>	5.00 ft	2.17 ft	6.00 ft	3.75 ft
84FR38	2,280 ft <sup>2</sup>	399 ft <sup>2</sup>	5.00 ft	2.17 ft	8.00 ft	3.75 ft
60FR46	1,380 ft <sup>2</sup>	345 ft <sup>2</sup>	5.50 ft	2.25 ft	6.00 ft	4.17 ft
84FR46	2,760 ft <sup>2</sup>	483 ft <sup>2</sup>	5.50 ft	2.25 ft	8.00 ft	4.17 ft
60FR54	1,620 ft <sup>2</sup>	405 ft <sup>2</sup>	6.00 ft	2.33 ft	6.00 ft	4.67 ft
84FR54	3,240 ft <sup>2</sup>	567 ft <sup>2</sup>	6.00 ft	2.33 ft	8.00 ft	4.67 ft
60FR62	1,860 ft <sup>2</sup>	465 ft <sup>2</sup>	6.50 ft	2.33 ft	6.00 ft	5.20 ft
84FR62	3,720 ft <sup>2</sup>	651 ft <sup>2</sup>	6.50 ft	2.33 ft	8.00 ft	5.20 ft

\*Larger size models available upon request

Specifications subject to change without notice.

### TRUSTED TO DELIVER®

Nol-Tec Systems, Inc | 425 Apollo Drive | Lino Lakes, MN 55014  
651.780.8600 | sales@nol-tec.com | www.nol-tec.com

5.023.SALE.01.31.25.05

