



NOL-TEC
SYSTEMS

AIR PAD DISTRIBUTOR


The low profile design of Nol-tec's air pad distributor promotes dependable material discharge from a silo, bin or hopper to multiple locations using minimal height.

STANDARD FEATURES:

- One, two, three, or four discharge locations
- Standard size combinations available:
 - 8" Body (inlet) w/4" pipe outlets
 - 12" Body (inlet) w/4" pipe outlets
 - 12" Body (inlet) w/8" pipe outlets
- Mild steel painted
- Temperature -20° to 200°F
- Fabric aeration membrane
- ANSI flange pattern
- Electrical: Designed to meet customers specifications

OPTIONAL FEATURES:

- Stainless steel construction
- Stainless steel membrane
- Temperature to 350°F
- Hazardous location design
- Inlet butterfly valve
- Use with a model 328 fluidizing bin bottom

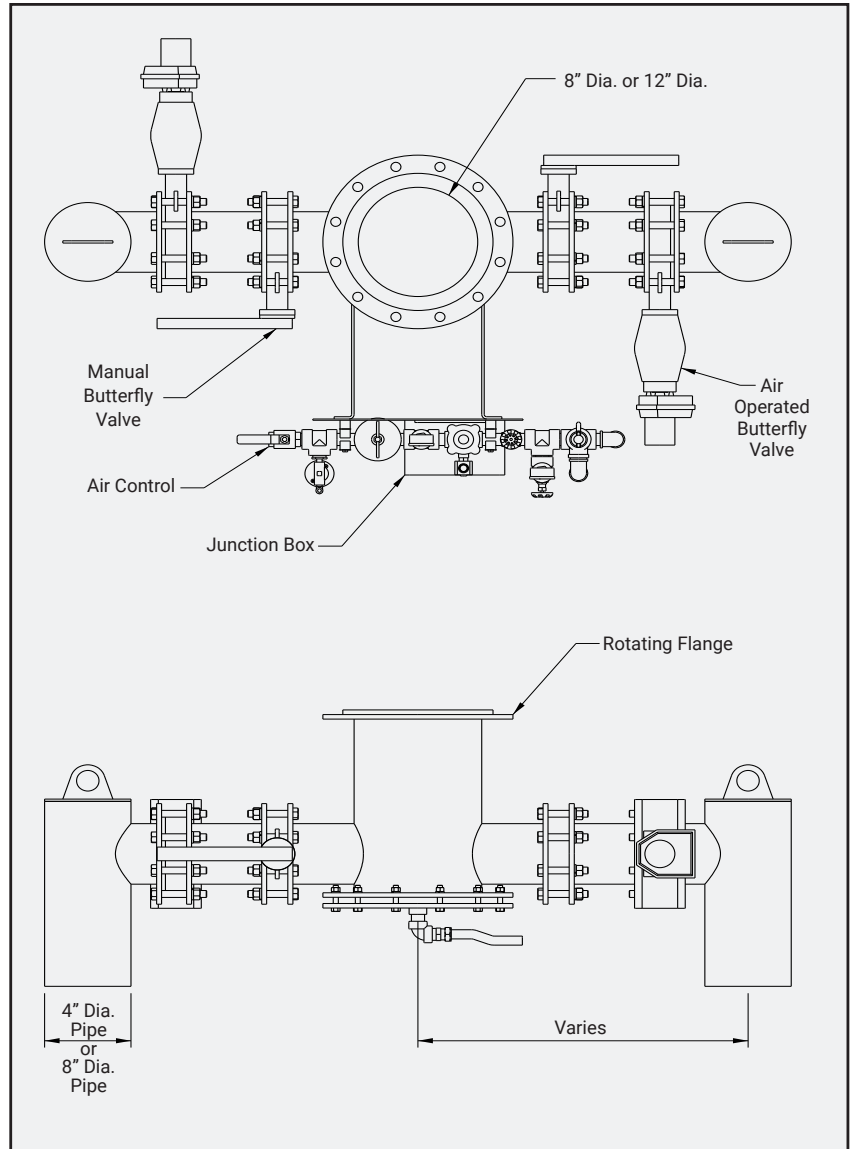

Specifications subject to change without notice.

TRUSTED TO DELIVER®

Nol-Tec Systems, Inc | 425 Apollo Drive | Lino Lakes, MN 55014
651.780.8600 | sales@nol-tec.com | www.nol-tec.com

5.175.SALE.02.03.25.03

